Model 2610

Mobile hoist Victor with Tilting spreader bar

Effortlessly from sitting to lying position








- For easy positioning in the wheelchair
- Simultaneous up/down and tilting adjustment with the hand control
- 360° rotation of the tilting spreaderbar
- Lifts twice as fast
- Designed for intensive use
- Electrically adjustable base
- Aluminium construction for easy care
- Exchangeable battery box or direct charging

Mobile hoist Victor with Tilting spreader bar

Dimensions (mm)

A	1725
B	660
B1	1150
H	775
H1	1530
H2	2240
h	120
C	440
C1	170
C2	620
L	1275
E	54
O	620
P	500
Q	570
R	455

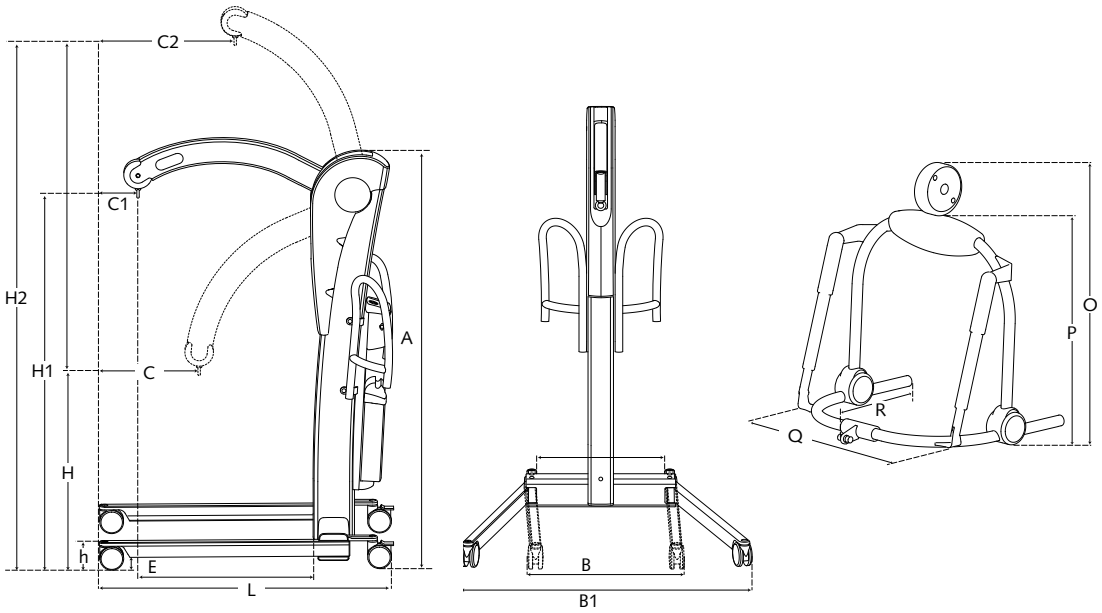

Specifications

Mobile hoist

Construction ..... aluminium; gloss finish
Covers ..... ABS
Weight ..... 58 kg
Motor/actuator ..... 24 Vdc, 13 A
..... electric/hydraulic
Weight batterybox ..... 6,2 kg
Safe working load ..... 225 kg
Emergency switch ..... present
Wheels: ..... front ø 100 mm
..... rear ø 100 mm with brakes
Emergency down ..... mechanical
Noise ..... 66 dBA
Battery-indicator ..... acoustic
Batteries ..... 2x12 Vdc; 8 Ah

Charger- in: ..... 0.9 A 100 - 240 VAC
..... 50 - 60 Hz, klasse II
Charger- out: ..... 24 Vdc
..... Max 1.3 A
Number of lifts when fully charged ... 160 lifts with 90 kg/distance 50 cm
Safety class IPx0
Charging time after signal ..... 4 hours
Wall-mount charger ..... optional
Extra battery box ..... optional

Tilting spreader bar

Construction ..... aluminium; gloss finish
Covers ..... ABS
Actuators ..... 24 Vdc max 4 A

Speeds

Speed up

without load ..... 5,2 cm/sec
load 90 kg ..... 4,9 cm/sec
load 225 kg ..... 4,6 cm/sec

Speed down

without load ..... 4,9 cm/sec
load 90 kg ..... 5,7 cm/sec
load 225 kg ..... 5,7 cm/sec

Tilting spreader bar

Sitting to lying position ..... 14 sec. (without load)

For free demonstration or further information

© 31-05-2024 • Handi-Move • v3.4

Handi-Move nv
Ten Beukeboom 13, B-9400 Ninove • Tel. +32 54 31 97 10
info@handimove.com • www.handimove.com